




LCD Video Wall

LCD video wall features ultra-narrow bezel panels to achieve nearly seamless visual performance. It supports flexible multi-screen splicing and 24-hour non-stop stable operation. Boasting high brightness and vivid color reproduction, it suits monitoring rooms, conference halls, shopping malls and various commercial public display occasions.



Hydraulic Front Service Mount



Integrated Video Wall Cabinet



Freestanding Frame Stand

Seams	0mm			0.88mm		1.7mm		1.8mm	3.5mm				8mm		
Size	46 "	49 "	55 "	46 "	55 "	46 "	55 "	55 "	46 "	49 "	55 "	65 "	43 "	65 "	75 "
Resolution	1920×1080											3840×2160	1920×1080		
Brightness	500cd/㎡														
Contrast	4500:1														
Response Time	6-6.5ms														
Viewing Angle	178°														
Service Life	Approximately 60,000 hours														
Install	Built-in / Wall-mounted / Floor-standing			Rack-mounted / Wall-mounted / Ceiling-mounted											




Narrow



Runtime



Brightness



Splicing



Hardness



Signal In



Radiating



Adapt

ISO 9001 • ISO 14001 • ISO 27001 • ISO 45001 • CE • FCC • CB • RoHS • COO • ANATEL


ODM

OEM


CKD

SKD


Connection Scheme

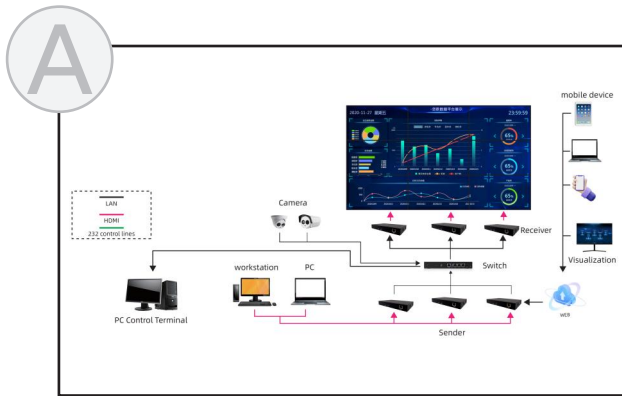


Distributed processor connectivity

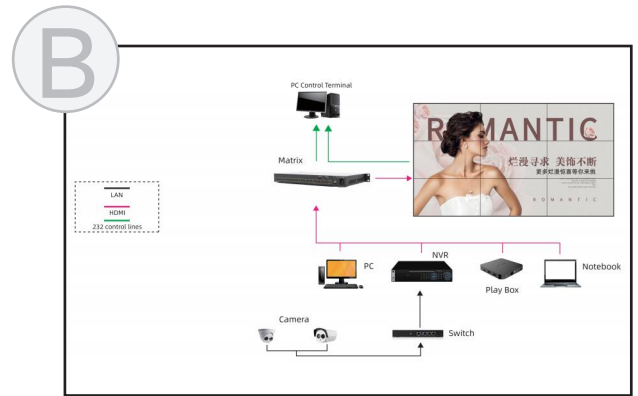


Matrix connection

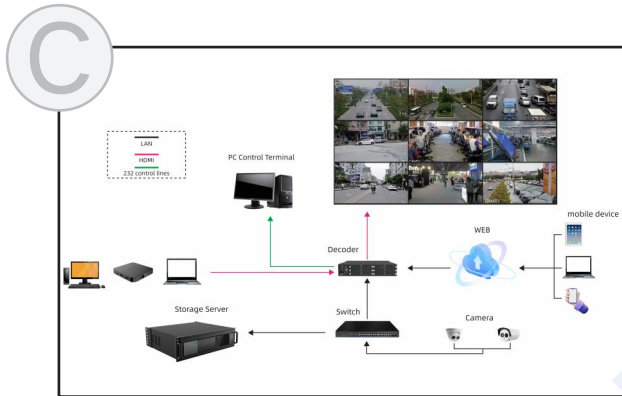


Decoder connection

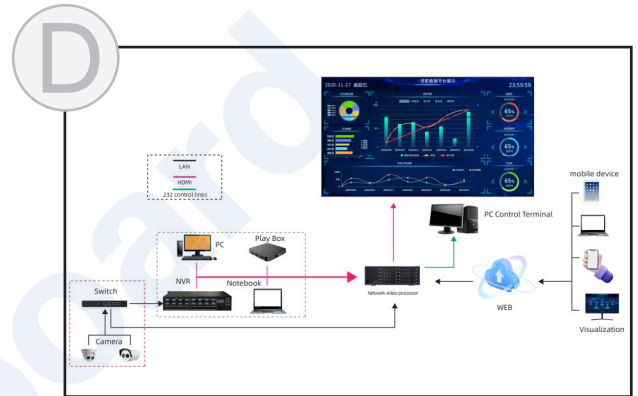

Cloud splicing processor connection

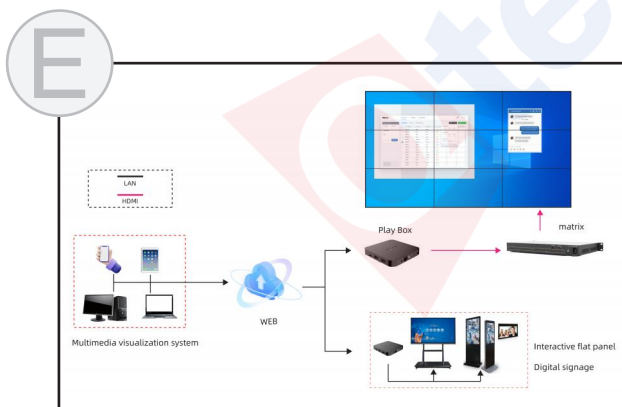

Multimedia visualization system

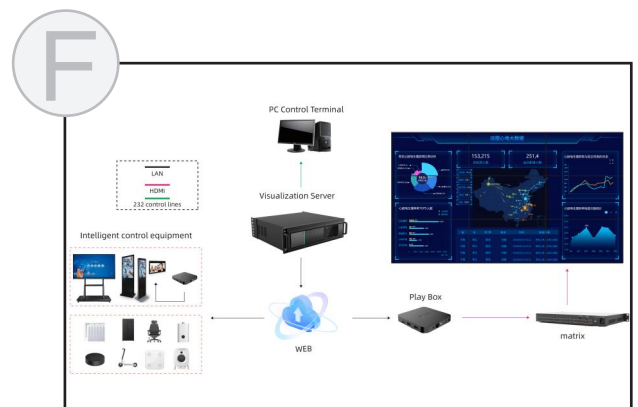

Large-scale multimedia visualization



HEADQUARTERS ADDRESS

Address: 6th Floor, Building A, No. 3, North District,
Shangxue Technology Park, Bantian Street, Longgang
District, Shenzhen



Mobile / WhatsApp / Telegram / Wechat
0086-18124713748



E-mail: info@qtenboard.com